

# Time Restrictions on Eircom Router


Eircom

Zyxel P660 Router



Access to your router is obtained through your internet browser i.e. internet explorer, Firefox, Google chrome etc.

The default web address for your router should be **192.168.1.254**; you can enter this in the web address bar as shown below through internet explorer.

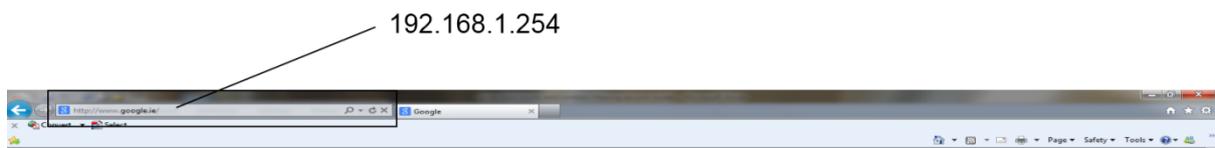


This will bring you to the following access screen. The default access details for eircom are as follows; these codes will only work as long as you have not changed or had them changed;

Username: [eircom@eircom.net](mailto:eircom@eircom.net)

Password: broadband1

# Time Restrictions on Eircom Router

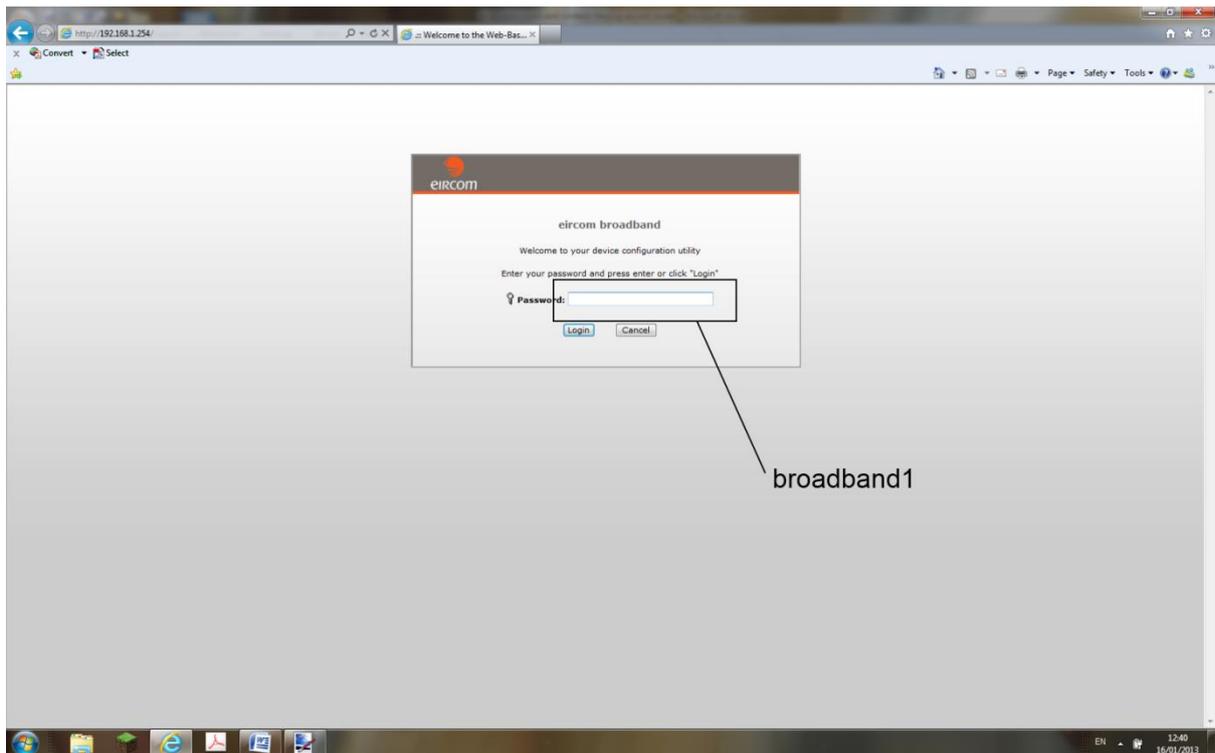

This will bring you in to the status screen of the router. Areas have been blacked out in the screenshot below but your access information will be listed here.

On the left side of the screen there are four drop down menus listed;

**Network**


**Security**

**Advanced**

**Maintenance**


Select Network from the drop down menu

# Time Restrictions on Eircom Router

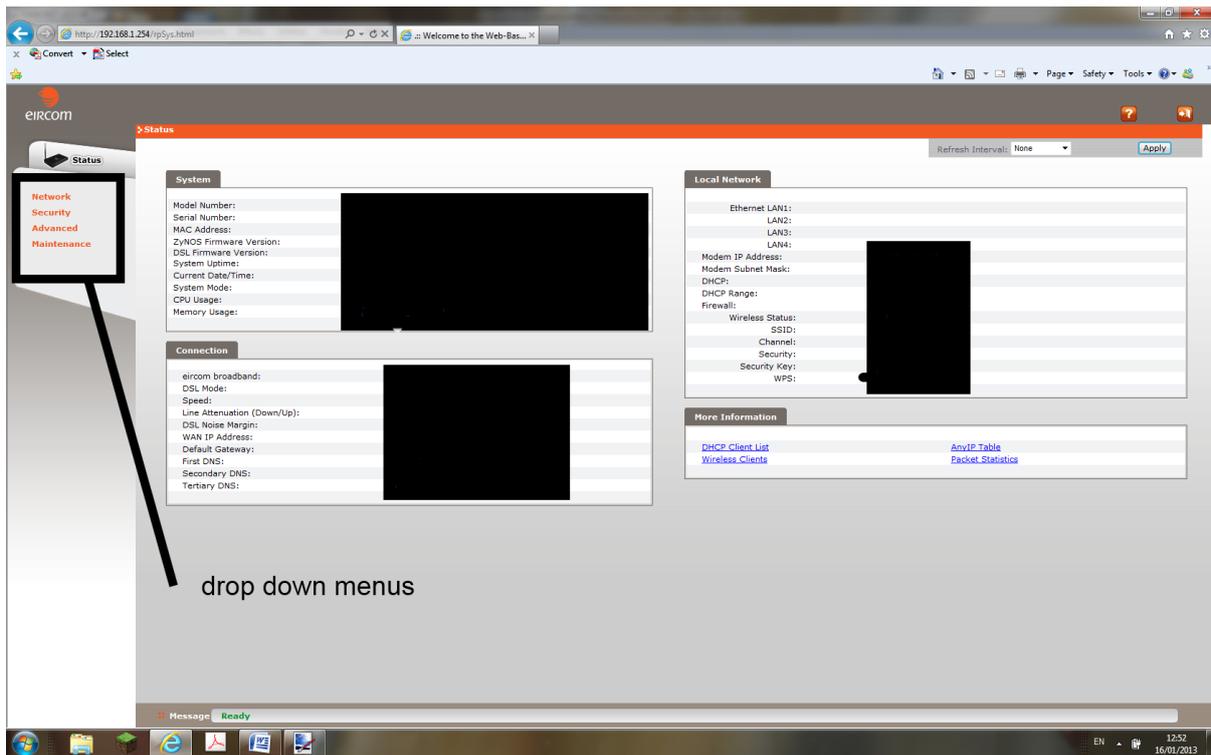

drop down menus


Then select Wireless LAN as detailed below;

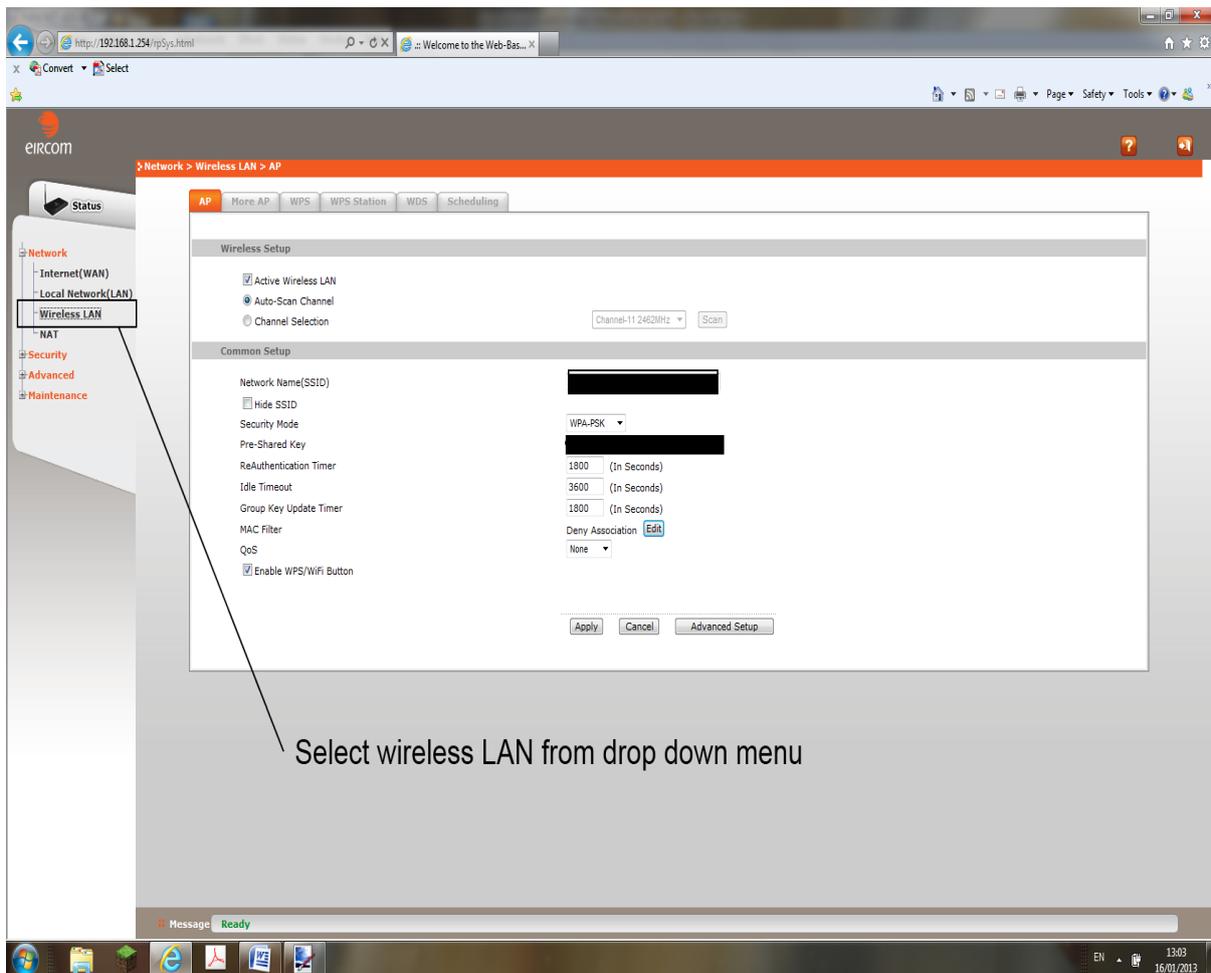

Select wireless LAN from drop down menu

# Time Restrictions on Eircom Router

Then select scheduling tab identified below,

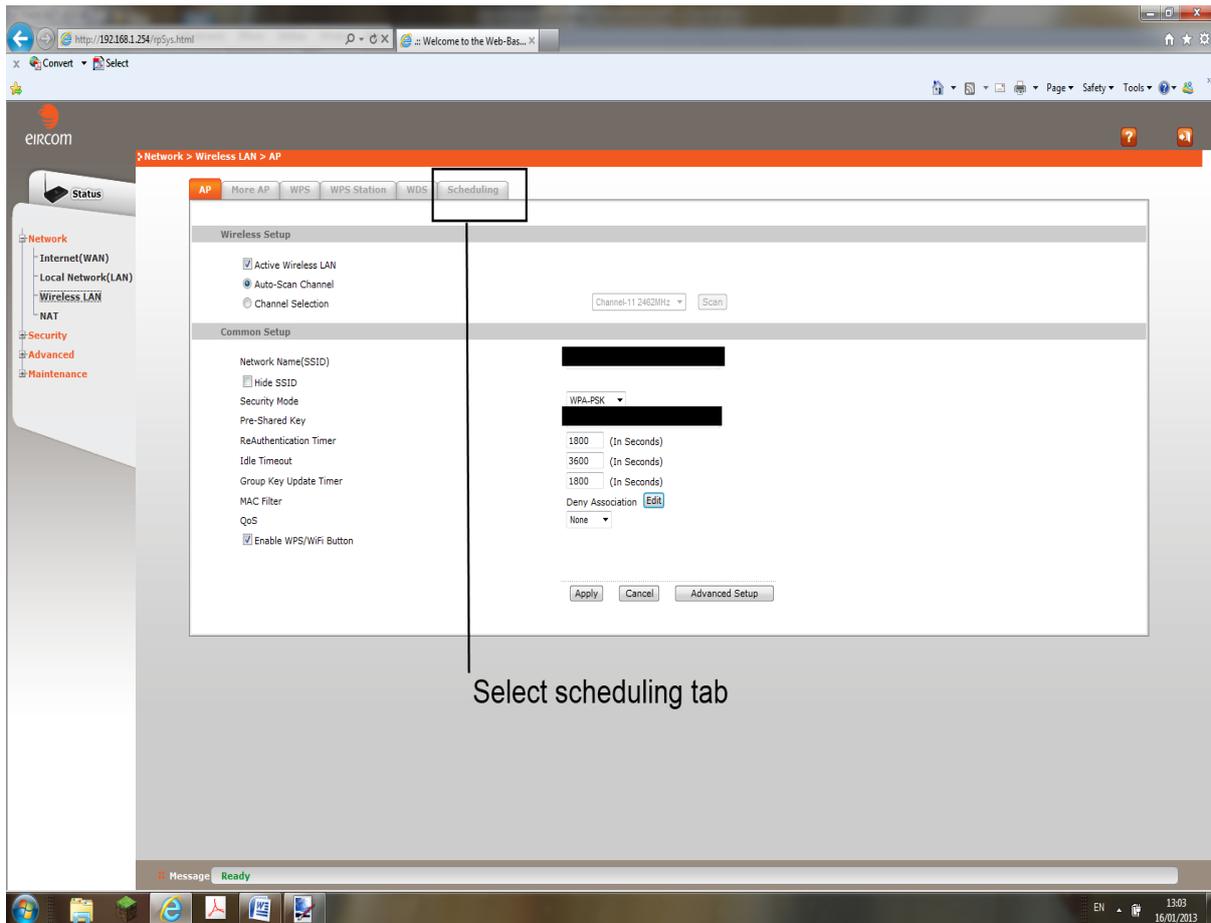

This brings you into the area for restricting wireless access. Here there are two sections.

1. Enable Wireless LAN Scheduling Everyday
2. Enable Wireless LAN Scheduling Daily

To restrict select the section you require marked Everyday or daily on the diagram. Then select WLAN status **off** within that section and then enter the start time you want it to be turned off from and the finish time when it will be turned back on. You can do this through the everyday section where it will apply to everyday or daily where you can turn it off on a daily basis.

DEFAULT SETTINGS ARE ALWAYS ON.

**When finished in this section click apply and in the message box it should display "configuration updated successfully".**

Finally click on the logout button in the top right hand corner of the screen.

# Time Restrictions on Eircom Router

The screenshot displays the Eircom router's web interface for configuring Wireless LAN Scheduling. The browser address bar shows `http://192.168.1.254/rpSys.html`. The interface includes a navigation menu on the left with categories like Network, Security, and Maintenance. The main content area is titled "Wireless LAN Scheduling" and contains two tables for configuring scheduling rules.

**Wireless LAN Scheduling - Everyday**

WLAN status	Day	Start Time	End Time
<input type="radio"/> Off <input checked="" type="radio"/> On	Everyday	00 (hour) 00 (min)	00 (hour) 00 (min)

**Wireless LAN Scheduling - Daily**

WLAN status	Day	Start Time	End Time
<input type="radio"/> Off <input checked="" type="radio"/> On	Mon	00 (hour) 00 (min)	00 (hour) 00 (min)
<input type="radio"/> Off <input checked="" type="radio"/> On	Tue	00 (hour) 00 (min)	00 (hour) 00 (min)
<input type="radio"/> Off <input checked="" type="radio"/> On	Wed	00 (hour) 00 (min)	00 (hour) 00 (min)
<input type="radio"/> Off <input checked="" type="radio"/> On	Thu	00 (hour) 00 (min)	00 (hour) 00 (min)
<input type="radio"/> Off <input checked="" type="radio"/> On	Fri	00 (hour) 00 (min)	00 (hour) 00 (min)
<input type="radio"/> Off <input checked="" type="radio"/> On	Sat	00 (hour) 00 (min)	00 (hour) 00 (min)
<input type="radio"/> Off <input checked="" type="radio"/> On	Sun	00 (hour) 00 (min)	00 (hour) 00 (min)

**Note:**

- 1: When a day is ticked and On is selected, wireless is off for the rest of that day, and vice versa.
- 2: Changes to wireless scheduler can take up to 60 seconds to take effect
- 3: To set an action for the whole day set start and end time both to 00:00.
- 4: For example, if wireless is to be enabled Saturday 09:00 to Sunday 02:00 and disabled all other times
  - Tick Enable Wireless LAN scheduling daily
  - Set Saturday to Off 00:00 to 09:00
  - Set Sunday to On 00:00 to 02:00
  - Set Monday to Friday Off 00:00 to 00:00

Buttons: Apply, Reset

Message box: Message Ready

For more information click here - <http://support.eircom.net/SRVS/CGI-BIN/WEBCGI.EXE/&/?New&Kb=BB&Company={8C5A3413-D734-4C47-9016-F9EBD3B87D94}>